




190-E24MC

24VDC Live Roller Modular Conveyor. The material handling world is evolving at a rapid pace. Hytrol's E24MC enables users to start quickly, pivot easily and work reliably in any situation. The 24VDC operation and self-contained controls allow for a speedy Plug-N-Go start-up, casters make quick installation and fast reconfiguration a breeze, and service and support from Hytrol's over 75 qualified Integration Partners that you can depend on consistently.

190-E24MC FEATURES

- Able to run 120' on single power supply
- Push button stations for start/stop/reverse
- 70 lbs. per motor
- Variable 30-180 FPM
- Capable of controlling other E24MC units anywhere along power chain
- E24 motor - 48 Watts
- Available in 2" or 3" roller centers
- Plug-N-Go Connection
- All-Electric
- Included casters and inset supports
- Available in straight, curve, gate, herringbone, and spur options

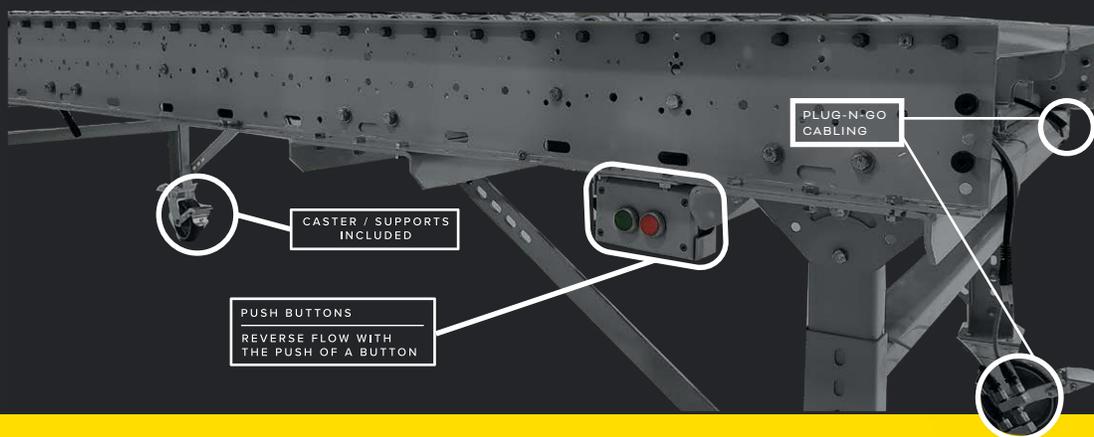

SPECIFICATIONS


190-E24MC

- LOAD CAPACITY ----- 70 LBS. PER MOTOR
- ROLLER CENTERS ----- 2" OR 3"
- ROLLER WIDTHS ----- 36" / 48"
- SPEED VARIABLE ----- 30-180 FPM
- CONVEYOR HEIGHT ----- 32"
- CASTER SIZE ----- 6"X 2"
- WARRANTY ----- 1 YEAR

PICTURES



E24MCH - Herringbone

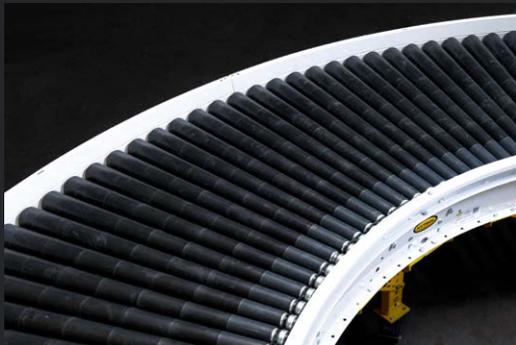

E24MCC - Curve



E24MCG - Gate



VISIT OUR WEBSITE TO LEARN MORE: HYTROL.COM